


Approved Riser Ring or Brick & Mortar Reconstruction

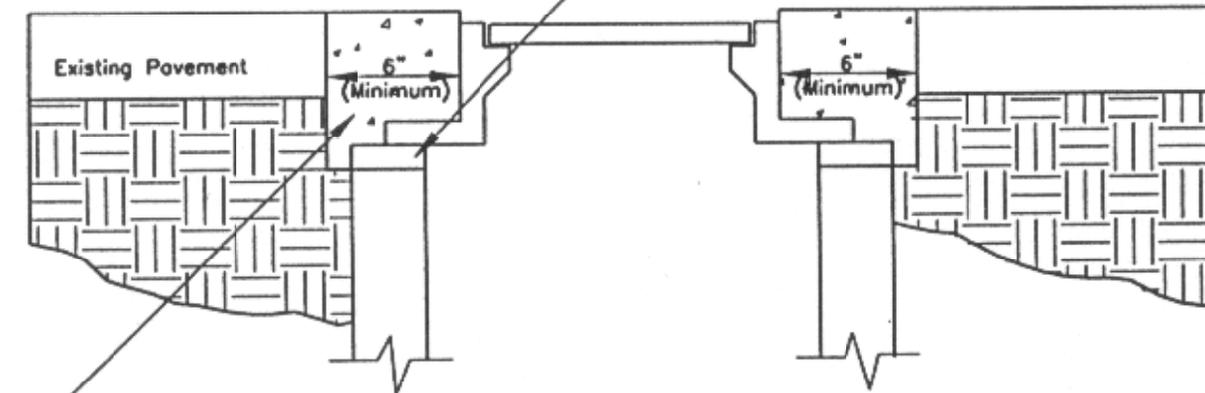

Concrete to extend to bottom of excavation.

Notes:

- 1) New casting to be sloped at the same rate as the existing surface.
- 2) High Early Strength Concrete is required.
- 3) Top of casting shall be $1/8$ " below existing pavement at the highest point.
($-1/8$ " tolerance is acceptable)
- 4) Limits of concrete patch to be sawn full depth of pavement.
- 5) This applies to any size/shape castings in county roads.

NO SCALE

HANCOCK COUNTY HIGHWAY DEPARTMENT

CASTING INSTALLATION AND
ADJUSTMENT DETAIL

STANDARD PLAN
250-0
SHEET 1 OF 1

USE WITH INDIANA DEPARTMENT OF TRANSPORTATION 1999 STANDARD SPECIFICATIONS