


CLASS I DRIVE (PRIVATE)
WITH SIDEWALK 6' AND OVER FROM FACE OF CURB
Not to Scale

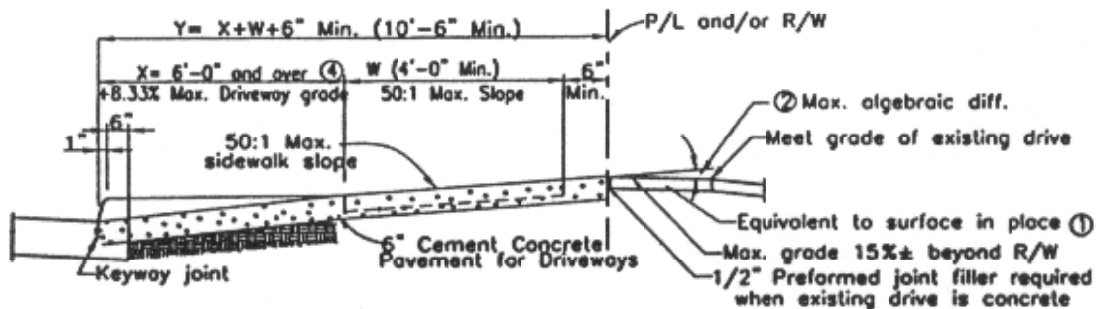

SECTION "C-C"
Not to Scale

- ① Refer to plans for pavement type and thickness required beyond Right-of-Way line, driveway width, length, and radii to be constructed.
- ② The Maximum algebraic difference in grades for any 10 foot interval shall not exceed 8% for crest vertical curves, nor 12% for sag vertical curves.
- ③ See INDOT Standard Drawing MHC for concrete curb and gutter connection detail and monolithic curb detail.
- ④ The limits for X are based on a 6 inch curb height. For other curb heights, these limits shall be adjusted.

Legend

- W = Width of sidewalk
- X = Distance between face of curb and sidewalk
- Y = Distance from face of curb to P/L and/or R/W

NO SCALE

HANCOCK COUNTY HIGHWAY DEPARTMENT

CLASS I DRIVE (PRIVATE)
WITH SIDEWALK 6' AND OVER FROM FACE OF CURB
USE WITH INDIANA DEPARTMENT OF TRANSPORTATION 1999 STANDARD SPECIFICATIONS

STANDARD PLAN
611-2
SHEET 1 OF 1