


**CLASS I DRIVE (PRIVATE)**  
**WITH SIDEWALK 2' TO LESS THAN 6' FROM FACE OF CURB**  
 Not to Scale

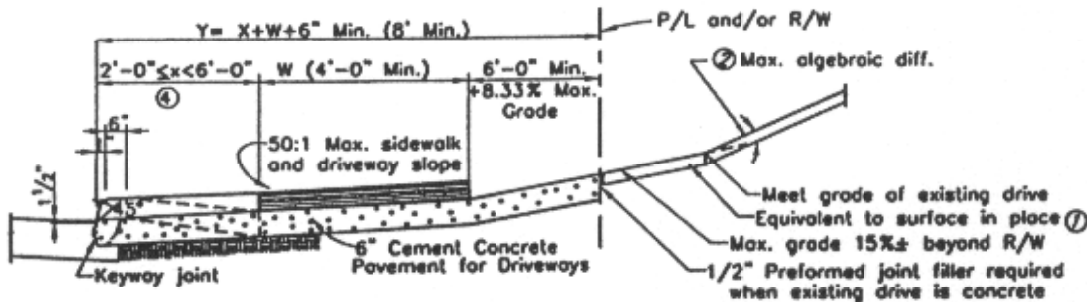

**SECTION "B-B"**  
 Not to Scale

- ① Refer to plans for pavement type and thickness required beyond Right-of-Way line, driveway width, length, and radii to be constructed.
- ② The Maximum algebraic difference in grades for any 10 foot interval shall not exceed 8% for crest vertical curves, nor 12% for sag vertical curves.
- ③ See INDOT Standard Drawing MHC for concrete curb and gutter connection detail and monolithic curb detail.
- ④ The limits for X are based on a 6 inch curb height. For other curb heights, these limits shall be adjusted.

**Legend**

- W= Width of sidewalk
- X= Distance between face of curb and sidewalk
- Y= Distance from face of curb to P/L and/or R/W
- Curb Ramp Type O (See sheets MHD and MHE)

NO SCALE

HANCOCK COUNTY HIGHWAY DEPARTMENT

CLASS I DRIVE (PRIVATE)  
 WITH SIDEWALK 2' TO LESS THAN 6' FROM FACE OF CURB

STANDARD PLAN  
 611-1  
 SHEET 1 OF 1

USE WITH INDIANA DEPARTMENT OF TRANSPORTATION 1999 STANDARD SPECIFICATIONS